



rbm1015205





6 ANCHIE BROS





WIDE TRACK
PERFORMANCE OFFROAD

31X38S





WIDE TRACK
PERFORMANCE LINE

101X690



WIDE-TRACK
MADE IN U.S.A.



WIDE TRACK
EASY PERFORMANCE SERIES

16x5x10



WIDE TRACK
DESIGNER SERIES



21X8X15

WIPAC

WIPAC TANKS



120/80R16

MAXXIS







Clay
RITCHIE BROS
Auctioneers





fb RITCHIE BROS.







AMETEK

eclipse II plus

Charger #3

11333
11333
11333

SALES & SERVICE
TECHNICAL SUPPORT
REPAIRS

WARNING
READ THE USER MANUAL
BEFORE OPERATING THE CHARGER
TO AVOID INJURY OR DAMAGE TO THE CHARGER
OR BATTERY. ALWAYS WEAR PROTECTIVE GEAR
AND FOLLOW ALL SAFETY PROCEDURES.
DO NOT TOUCH THE BATTERY TERMINALS
WHILE THE CHARGER IS OPERATING.
DO NOT OPEN THE CHARGER COVER
WHILE THE CHARGER IS OPERATING.
DO NOT REMOVE THE BATTERY FROM THE CHARGER
WHILE THE CHARGER IS OPERATING.
DO NOT OVERCHARGE THE BATTERY.
DO NOT OVERHEAT THE BATTERY.
DO NOT OVERVOLT THE BATTERY.
DO NOT OVERCURRENT THE BATTERY.
DO NOT OVERTEMPERATURE THE BATTERY.
DO NOT OVERPRESSURE THE BATTERY.
DO NOT OVERSTRESS THE BATTERY.
DO NOT OVERUSE THE BATTERY.
DO NOT OVERMISUSE THE BATTERY.
DO NOT OVERABUSE THE BATTERY.
DO NOT OVERNEGLECT THE BATTERY.
DO NOT OVERIGNORE THE BATTERY.
DO NOT OVERDISREGARD THE BATTERY.
DO NOT OVERVIOLATE THE BATTERY.
DO NOT OVERDISOBEY THE BATTERY.
DO NOT OVERDISRESPECT THE BATTERY.
DO NOT OVERDISOBEY THE BATTERY.
DO NOT OVERDISRESPECT THE BATTERY.

AMETEK
ECLIPSE II PLUS
CHARGER #3
11333
11333
11333

AMETEK
ECLIPSE II PLUS
CHARGER #3
11333
11333
11333

Charger #3

METEK
PRESTOLITE POWER

DAILY CHARGE

Connect battery to charger. Charger will start automatically after a brief delay.

EQUALIZE CHARGE

Connect battery to charger and press the EQUALIZE key.

CHARGE COMPLETE

80% CHARGED

CHARGE IN PROGRESS

EQUALIZE

MANUAL STOP



eclipse II plus

⚠ DANGER

ELECTRIC SHOCK can cause injury or death. Disconnect from input power and battery before servicing or dismantling. Do not touch uninsulated battery terminal, connectors or other live electrical parts.

LES CHOCS ÉLECTRIQUES peuvent causer des blessures et entraîner la mort. Débrancher le chargeur de la prise d'alimentation et de la batterie avant d'effectuer une réparation ou le démontage. Ne pas toucher les parties non isolées des bornes ou des connecteurs de la batterie ou tout autre pièce sous tension.

RISQUE DE CHOCS ÉLECTRIQUES.

Ne pas toucher les parties non isolées du connecteur de sortie ou les bornes non isolées de l'accumulateur.

EXPLOSIVE GASES are produced by the battery. Do not smoke, cause sparking or use open flame near battery.

DES GAZ EXPLOSIFS sont produits par la batterie. Ne fumez pas, ne créez pas d'étincelles ou utilisez une flamme nue à proximité de la batterie.

ARCING AND BURNING can damage battery and charging connectors. Turn charger OFF before connecting or disconnecting battery.

LA FORMATION D'ARC ET LA COMBUSTION peuvent endommager la batterie et les connecteurs du chargeur. Mettre le chargeur HORS TENSION avant de brancher/débrancher la batterie.


Only qualified personnel should install, use or service this charger. Read and understand the manufacturer's instructions and your employer's safety practices.

Seul le personnel qualifié doit installer, utiliser ou réparer ce chargeur. Lire et comprendre les instructions du fabricant et les pratiques de sécurité de votre employeur.



RITCHIE BROS.
Appliances

Access123
Comprehensive System Control

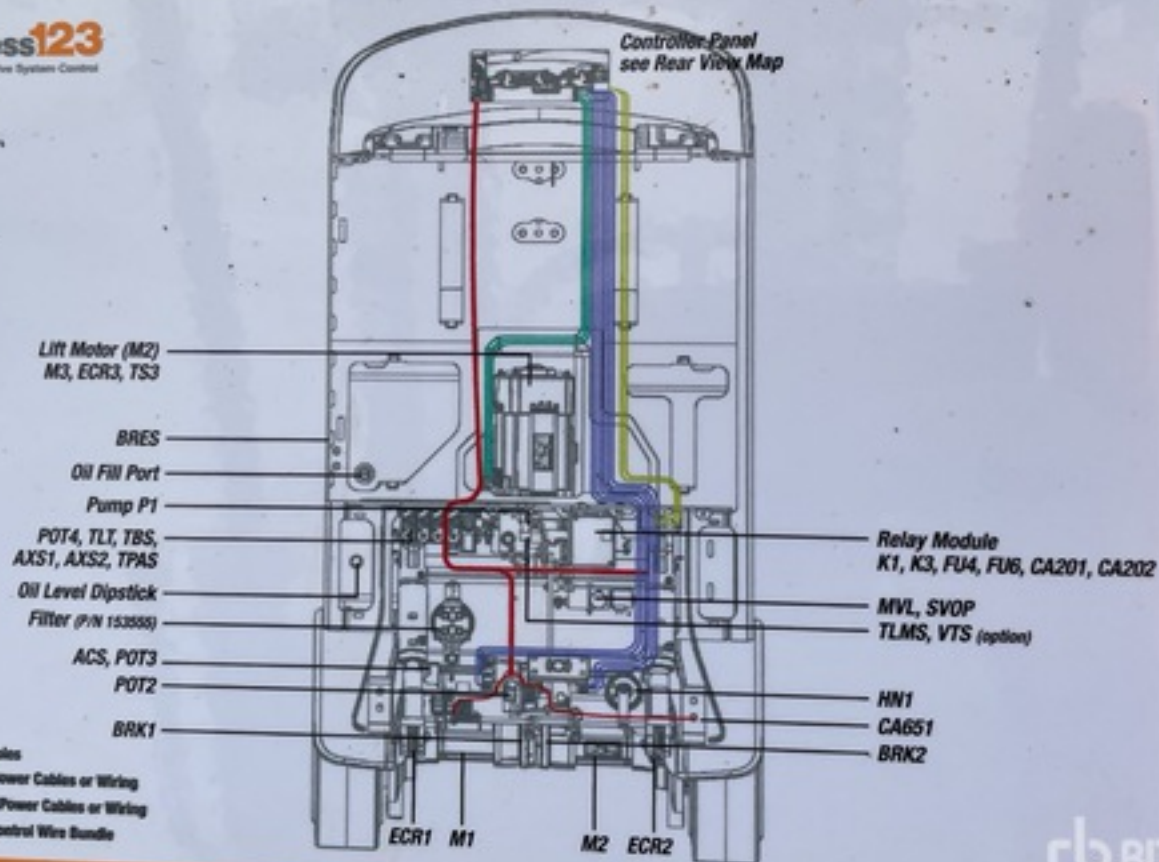

 **WARNING**

Minimum battery size allowed

796 mm (31.35 in.) wide

972 mm (38.25 in.) long

Undersize battery can affect truck handling and stability. You could have an accident.

Use U.L. classified Type EO battery.

112-064





1.800.450.4000



Units of measure, kg/mm (lb/in)

Battery Weight

1815 (4000) Max **1270 (2800)** Min

Truck Weight Less Battery \pm 5%

Hour Rate

3600 (7940)

6

Battery Type

D.C. Voltage

Max. AMP Hr.

EO

36

1430

Max. Grade with **305 (12)**

Max. Fork Height

5

%

Load Tire Tread Width

940 (36.9)

Model Number

Max. Tilt Back

FC5225-50

5

$^{\circ}$

Serial Number

Fork Length

10101676

1065 (42)

Truck Data Number

B-TT18833-MSSSM3662-1-

This truck as released conforms to the mandatory requirements
of ANSI/ITSDF B56.1


Crown Equipment Corporation
New Bremen, Ohio 45869 USA

314-001E

fb RITCHIE BROS.
Auctioneers

CROWN

ACC
Comprehe

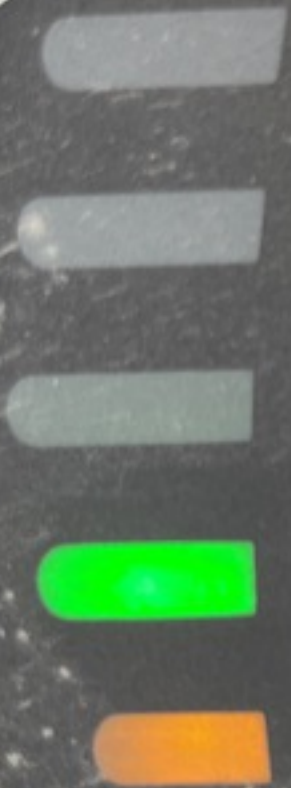

P1

P2

P3



PERFORMANCE

fb RITCHIE BROS







rentalcars.com



Truck Weight, Less Load, with Max.
Battery, and Attachment + 5%

5415 (11940) kg (lb)

Attachment Data
**CASCADE
SIDESHIFTER
55F-SSS-A060**

Serial Number Truck Type
10101676 **E**

**S200
SERIES**



Capacity with Mast Vertical

Capacity	C	A	
600 (24)	kg (lb)	mm (in)	mm (in)
2154 (4750)	4775 (188)	600 (24)	
2199 (4850)	4470 (176)	600 (24)	
2222 (4900)	4165 (164)	600 (24)	