









 **TOYOTA**

 **RITCHIE BROS.**
Auctioneers



FB RITCHIE BROS.



TO RICHIE BROS.
EQUIPMENT







ГОРЯЧИЙ





FRITCHIE BROS.
AUTOMOTIVE





WARNING

FLORITCHEBROS.



DO NOT OPERATE THIS
EQUIPMENT WITHOUT
THE PROPER TRAINING
AND CERTIFICATION

TOYOTA
WARNING
DO NOT OPERATE
THIS EQUIPMENT
WITHOUT THE
PROPER TRAINING
AND CERTIFICATION



TOYOTA








ORTIZHERROS
Auto



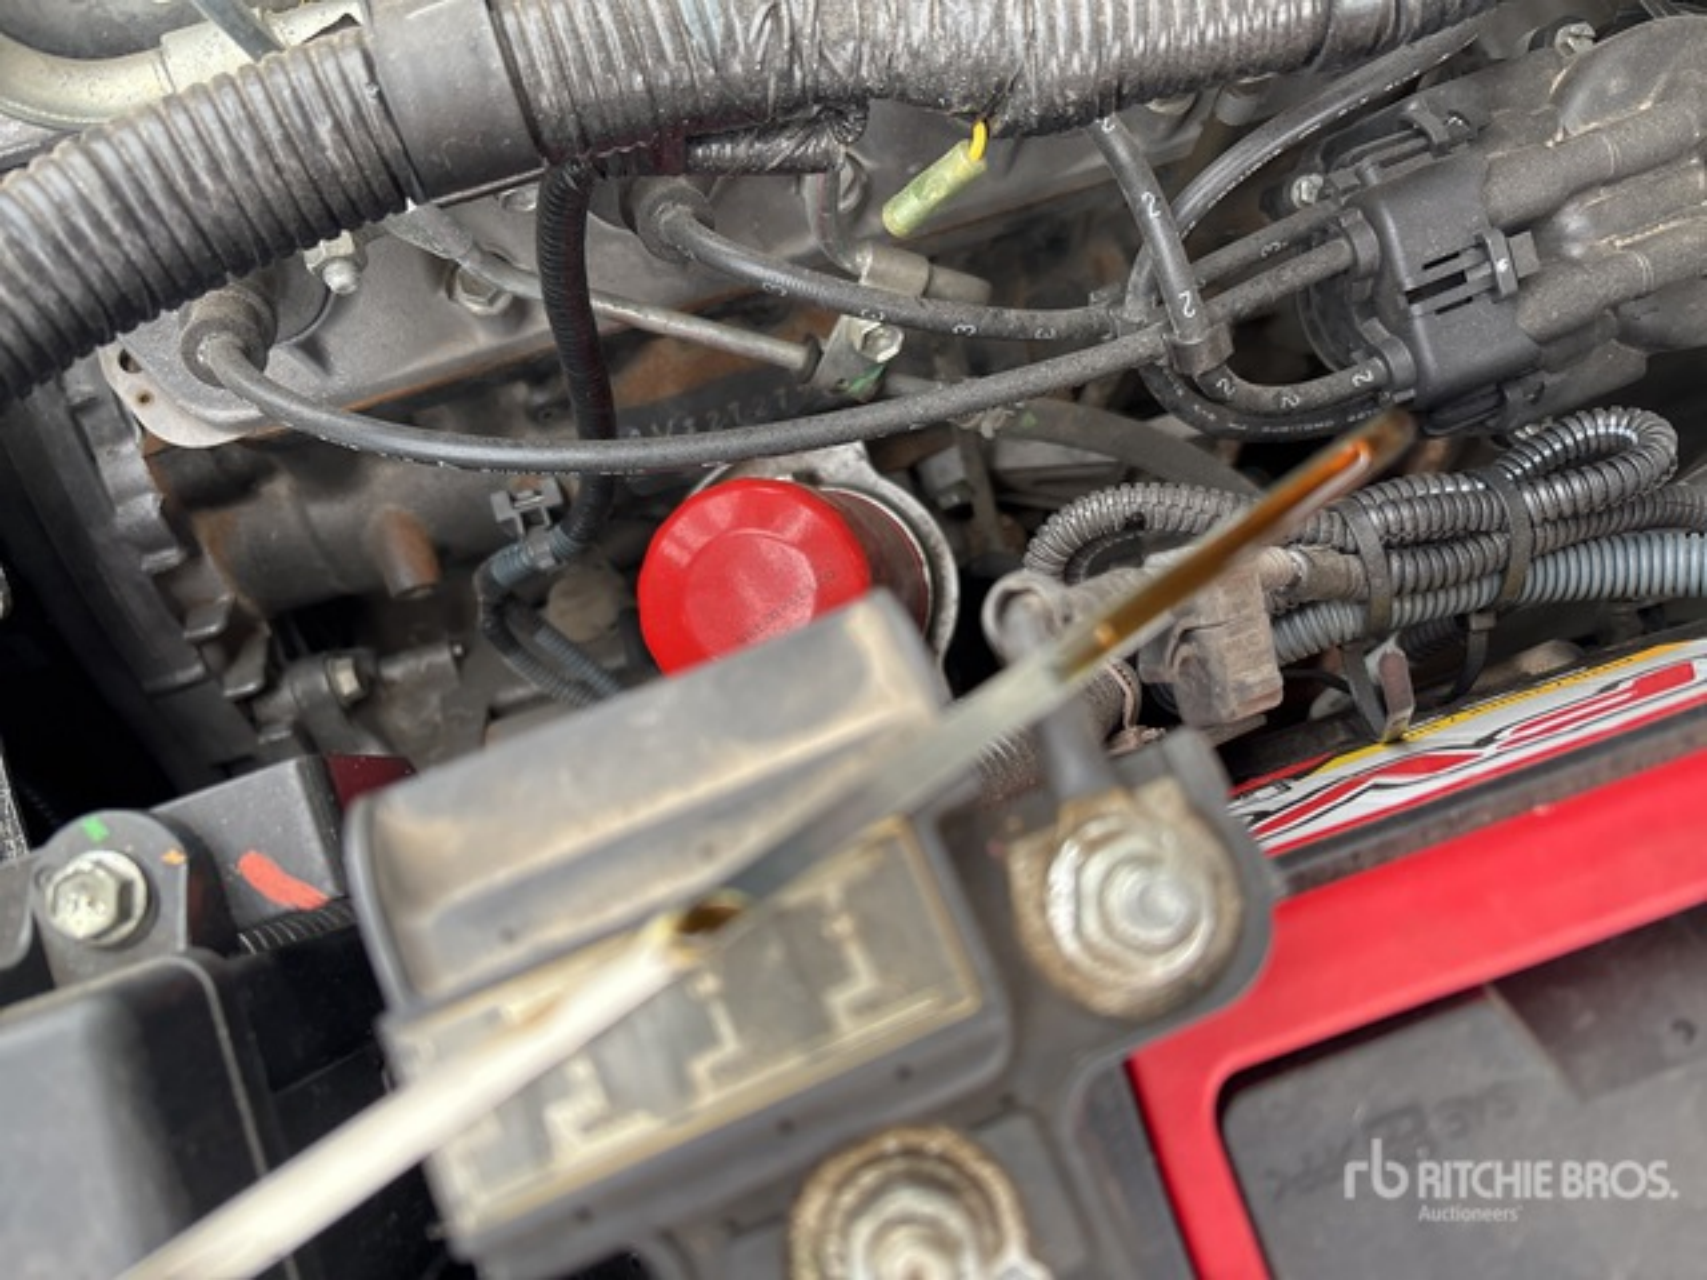

TOYOTA

4Y ECS

EMISSION CONTROL INFORMATION

THIS ENGINE COMPLIES WITH U.S. EPA
AND CALIFORNIA REGULATIONS FOR
2019 LARGE NONROAD SI ENGINES.
USE IN VARIABLE-SPEED APPLICATIONS ONLY.
TOYOTA INDUSTRIAL EQUIPMENT MFG., INC.

THIS ENGINE IS CERTIFIED TO OPERATE ON LPG & GASOLINE

ENGINE FAMILY	4Y1602-20MY
DISPLACEMENT	2.232 LITERS
MAX POWER (kW/hp)	38/2570 (2. 38/2570 @)
MAX SPEED	2570 rpm
USEFUL LIFE	5000 hrs. or 7 years

NO OTHER ADJUSTMENTS

SPARK PLUG GAP	0.7
FIRING ORDER	1-3-4-2
IGNITION TIMING	7° BTDC

7YWC 1402S MPT M16 184
S/N 11208 UD242-71

EMMISSIONS STANDARD
CD 20.0g/kWh
HCL NO. 2.0g/kWh
Y3



TOYOTA

4W EFS

LEGEND
95

⚠ DANGER/POISON

rb RITCHIE BROS




TOYOTA FORKLIFT TRUCK

MODEL **8FGU25** SERIAL NO. **95808**
 MAST **F.S.V.** BACK TILT **6** ATTACH **SIDE SHIFTER**
 TYPE **CLP**

FRONT TREAD **43.1** in **1095** mm TIRE FR **7.00-12/SOLID**
 SIZE RR **6.00-9/SOLID**

TRUCK WEIGHT **8810** lb
 ACCURACY $\pm 5\%$ **4000** kg

RATED CAPACITY WITH VERTICAL MAST EQUIPPED AT MAX. LIFT HEIGHT 'C' AS SHOWN.



	A	B	C	D	CAPACITY	
in	24	24	189	0	4500	lb
mm	600	600	4800	0	2050	kg
in	30	30	189	0	3950	lb
mm	760	760	4800	0	1750	kg

THIS FORKLIFT TRUCK
 MEETS OR EXCEEDS DESIGN
 SPECIFICATIONS OF ANSI/
 ITSDF B56.1 IN EFFECT ON
 THE DATE OF MANUFACTURE.



WARNING

IMPROPER OPERATION OR MAINTENANCE COULD RESULT
 IN INJURY OR DEATH. TRAINED OPERATORS ONLY.
 READ OPERATOR'S MANUAL FIRST.

57899-U2260-71

F2 ENGLISH 57846-U2173-01

1545.9h







TOYOTA



PITCHIE BROS.
AUCTIONEERS







