





S417 TC

54







9
54

NO







MANUFACTURED BYEVOBUS GMBH
STUTTART, GERMANY**GVWR**

22 920 KG (50 530 LBS)

DATE

August 2016

GAWR	TIRE	RIM	COLD INFLATION PRESSURE		
			PSI	KPA	
FRONT 7 500 KG (16 530 LBS)	315 / 80 R 22.5 'J'	22.5 x 9.00	123	849	SINGLE
REAR 9 072 KG (20 000 LBS)	315 / 80 R 22.5 'J'	22.5 x 9.00	94	649	DUAL
TAG 6 350 KG (14 000 LBS)	315 / 80 R 22.5 'J'	22.5 x 9.00	94	649	SINGLE

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS
IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE

V.I.N.

WVG2AS00PXP001293

TYPE OF VEHICLE

BUS













SETRA









0.12
in

32
mm

ON 0 mm in/F HOLD

KOBALT
CELSTAR







BOTO

MADE IN CHINA

ALL STEEL WHEEL
REGISTRATION

TRADE MARK
REGISTERED IN THE U.S. PATENT OFFICE
AND IN OTHER COUNTRIES
© 1998 BOTO TIRE CO. ALL RIGHTS RESERVED











DETROIT

TRACTOR ENGINE INFORMATION
SERIAL NUMBER 40V HP 3111 MALIBU TRUCK
NET RATING 100000 HP 3111 MALIBU TRUCK
ENGINE FAMILY 6-9000-42 SPEED
PART # 1152C0251420 DISC 13.8 LITERS
NOV 95 6280 1425 RPM MODEL D011
MFG DATE 03/01/01 MFG CODE 000001
TRUCK ENGINE ASSEMBLY 05 MM - 05 MM 0.1 MM
OR LEGATED ASSEMBLY
EMISSION CONTROL SYSTEM D011C 0.1 MM
FOR THE R102 SCRAM MARK
FOR USE IN OPERATIONS ON TRACTOR VEHICLES

THIS ENGINE CONFORMS TO EEC, EPA & CANADA
REGULATIONS APPLICABLE TO 2014 MODEL YEAR
HEAVY DUTY DIESEL CYCLE ENGINES. THIS ENGINE IS
A PRIMARY SERVICE APPLICATION FOR A
HEAVY DUTY ENGINE. THE ENGINE IS NOT DESIGNED
FOR USE IN OPERATIONS AS DEFINED AT
PAGE 243 OF THE OPERATOR'S MANUAL.
FOR INFORMATION OF THE USER, THE ENGINE IS
DESIGNED TO OPERATE AT A LOW RATED DIESEL
POWER OF 100000 HP (74600 kW) AT 1425 RPM.

BT 968

DOT 800J BTFE

SAFETY
INFLATE TO
RECOMMENDED
PRESSURE

315/80R22.5

STANDARD RIM 8.00





Do Not Remove anything
of this Bin Please

10













Continental



5



Conti Coach HA3

ALDA

ELKROY



M 315/30 R 22.5

(G) M+S

MAXIMUM LOAD
SEE USER MANUAL

SAFETY WARNING
SEE USER MANUAL



0 11/32" n

ON 0 mm in/F HOLD



0.12 in

ON 0 mm in/F HOLD

WATER



BOTO

MADE IN CHINA

MAX LOAD
MAX PRESSURE



BT 968

300J BTFL

315/80R22.5

HYUNDAI HYUNDAI 400



ON 0 mm in/F HOLD

0.16



BOTO

ALL-STEEL RIM
12x18

MADE IN U.S.A.
12x18
12x18



BT 968

5

NOT FOR SALE

5

5

315/80R22.5

STANDARD RIM 500

ROSENBERG





BOTO

BT968

DOT 800J BH

STP



BRIDGESTONE



BRIDGESTONE

315/80R22.5

STANDARD PW 660





0 $\frac{32}{100}$ in

ON 0 mm in/F HOLD



Continental


157



Conti Coach HA3



A 315/80 R 22.5



M/S

RETRACTABLE

MOVABLE

SAFETY



0 $\frac{12}{32}$ in

ON 0 mm in/F HOLD


















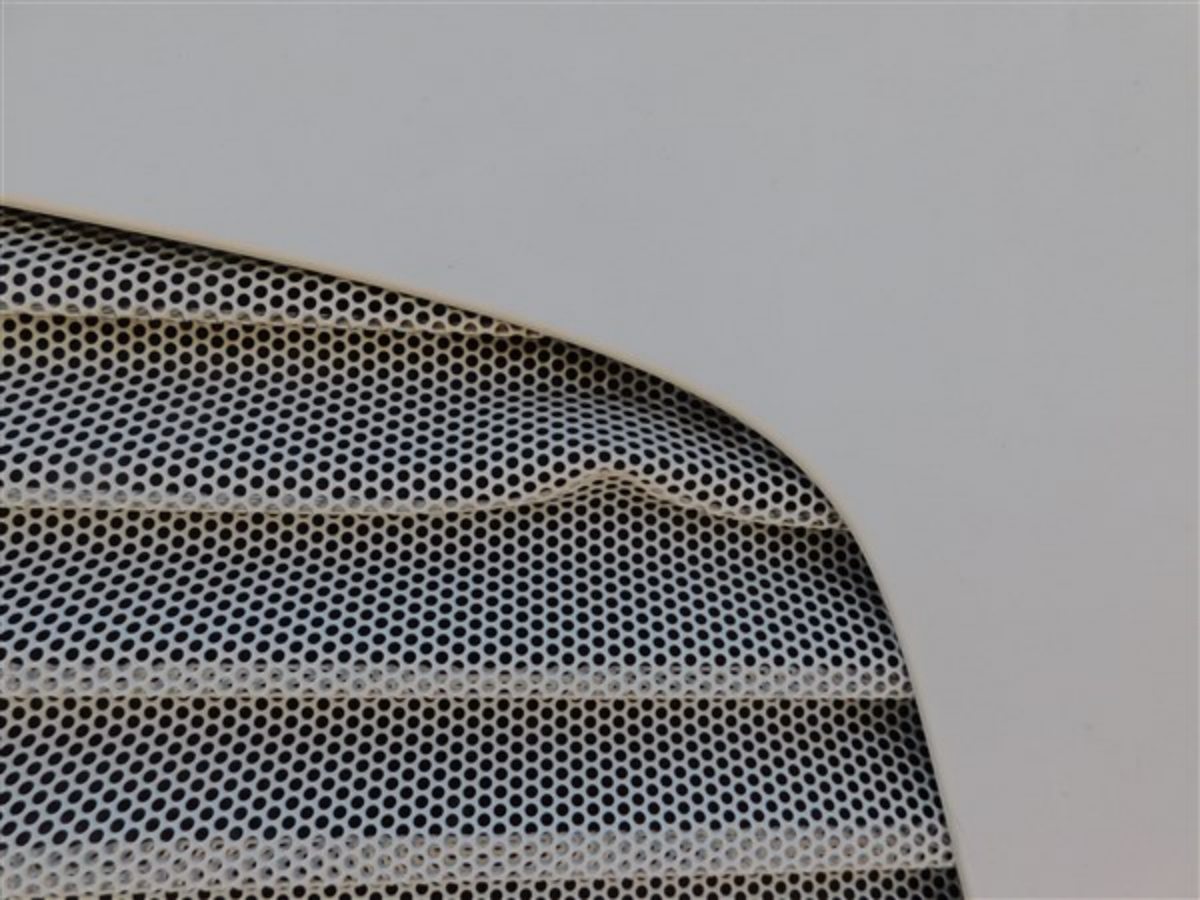

Diagnose Process

Engine

T Read version information

B Component ID: DTDSC*471N16*471938C
0251420* *

VIN Code: WKKA574HXH3010293

Software ID: 040*000*000*000*R*D*A*
014*004*17*05*19*11*21*16.8200.00104*

Total Vehicle Distance(miles):284148.46

DIESELHANDHELD



DTC

SPN 5443 1/2

Aftertreatment 1

Hydrocarbon Dosing System

DTC Status:

Inactive, FMI=15, 1 Times

DIESELHANDHELD



DTC

SPN 1121 2/2

EBS Brake Switch

DTC Status:

Inactive, FMI=13, 1 Times



RESET



DIAG

SET

